

Eos 45

IP20





48 V
CV

RG1

CE

Ta
35°

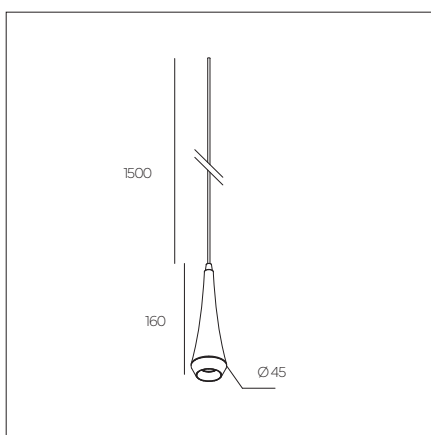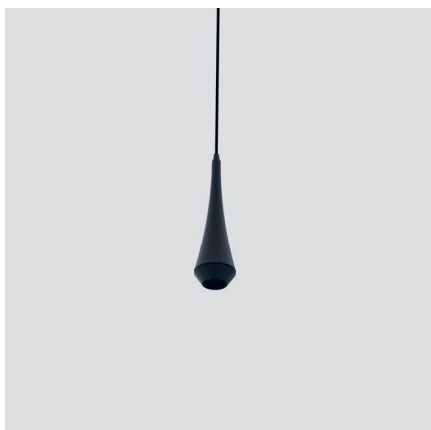

0,2 Kg



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom
Disponibili / Available

Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
4.5	4	350	>90	2700K	380	225
				3000K	387	229
				4000K	433	256

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
7131	Z 2700 7 3000 8 4000	B 4.5	E 20° N 40° O 20x60°	1 Bianco White 2 Nero Black	Not included

Rosoni / Canopies



Rosone ad incasso - driver on-off incluso
Trim reces. canopy - on-off driver included
Ø 60 - h (recessed) 35 mm

7131IBE1
7131IBE2



Rosone ad incasso - driver DALI/Push incluso
Trim reces. canopy - DALI/Push driver included
Ø 60 - h (recessed) 35 mm

7131IBL1
7131IBL2



Rosone a superficie - 48V
Surface canopy - 48V
Ø 40 - h 30 mm

7131S481
7131S482

Alimentatori / Drivers



Alimentatore 70W (48V)
Driver 70W (48V)

122786



Alimentatore 150W (48V)
Driver 150W (48V)

127356



Alimentatore 240W (48V)
Driver 240W (48V)

XLG-240-H-ADI



Interfaccia dimm. Push
Push dim. interface

MINI-1CV



Interfaccia dimm. DALI
DALI interface

MINI-1CV-DALI

Eos 65



IP20



RG1

CE

Ta
35°

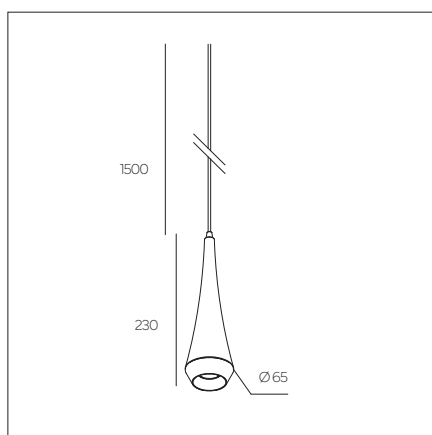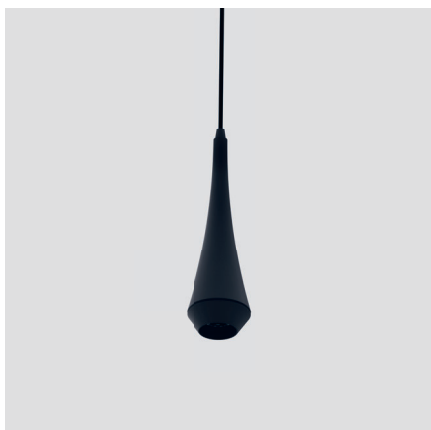

0,4 Kg



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom
Disponibili / Available

Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
13.5	12	350	>90	2700K 3000K 4000K	881 920 984	784 819 876

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
7132	Z 2700 7 3000 8 4000	B 13.5	C 14° F 24° N 40° S 55°	1 Bianco White 2 Nero Black	Not included

Rosoni / Canopies



Rosone ad incasso - driver on-off incluso
Trim reces. canopy - on-off driver included
Ø 60 - h (recessed) 35 mm

7131IBE1
7131IBE2



Rosone ad incasso - driver DALI/Push incluso
Trim reces. canopy - DALI/Push driver included
Ø 60 - h (recessed) 35 mm

7131IBL1
7131IBL2



Rosone a superficie - driver on-off incluso
Surface mounted canopy - On-off driver included
Ø 60 - h 35 mm

7131SBE1
7131SBE2



Rosone a superficie - driver DALI/Push remoto incluso
Surface canopy - Remote DALI/Push driver included
Ø 60 - h 35 mm

7131SBL1
7131SBL2



Rosone a superficie - 48V
Surface canopy - 48V
Ø 40 - h 30 mm

7131S481
7131S482

Alimentatori / Drivers



Alimentatore 70W (48V)
Driver 70W (48V)

122786



Alimentatore 150W (48V)
Driver 150W (48V)

127356



Alimentatore 240W (48V)
Driver 240W (48V)

XLG-240-H-ADI



Interfaccia dimm. Push
Push dim. interface

MINI-1CV



Interfaccia dimm. DALI
DALI interface

MINI-1CV-DALI

Eos 80



IP20



RG1

CE

Ta
35°

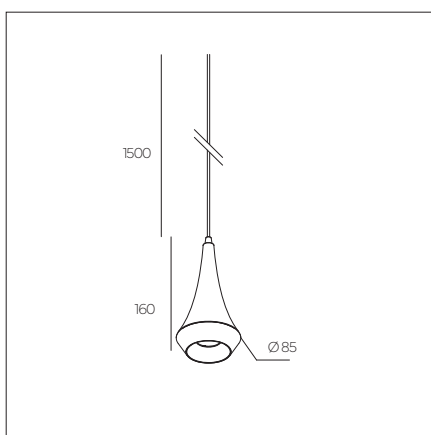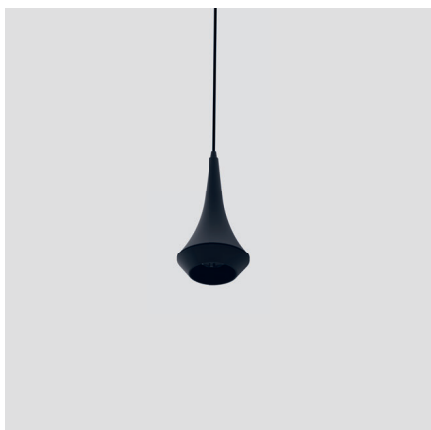

0,4 Kg



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom
Disponibili / Available

Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
13.5	12	350	>90	2700K 3000K 4000K	881 920 984	784 819 876

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
7133	Z 2700 7 3000 8 4000	B 13.5	C 14° F 24° N 40° S 55°	1 Bianco White 2 Nero Black	Not included

Rosoni / Canopies



Rosone ad incasso - driver on-off incluso
Trim reces. canopy - on-off driver included
Ø 60 - h (recessed) 35 mm

7131IBE1
7131IBE2



Rosone ad incasso - driver DALI/Push incluso
Trim reces. canopy - DALI/Push driver included
Ø 60 - h (recessed) 35 mm

7131IBL1
7131IBL2



Rosone a superficie - driver on-off incluso
Surface mounted canopy - On-off driver included
Ø 60 - h 35 mm

7131SBE1
7131SBE2



Rosone a superficie - driver DALI/Push remoto incluso
Surface canopy - Remote DALI/Push driver included
Ø 60 - h 35 mm

7131SBL1
7131SBL2



Rosone a superficie - 48V
Surface canopy - 48V
Ø 40 - h 30 mm

7131S481
7131S482

Alimentatori / Drivers



Alimentatore 70W (48V)
Driver 70W (48V)

122786



Alimentatore 150W (48V)
Driver 150W (48V)

127356



Alimentatore 240W (48V)
Driver 240W (48V)

XLG-240-H-ADI



Interfaccia dimm. Push
Push dim. interface

MINI-1CV



Interfaccia dimm. DALI
DALI interface

MINI-1CV-DALI