

Mini R 45 UGR<19

IP40




RG1


UGR
<19

CE

Ta
35°

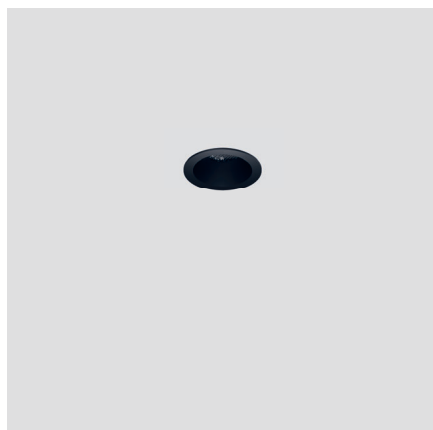

Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
4.5	4	350	>90	2700K	380	225
				3000K	387	229
				4000K	433	256

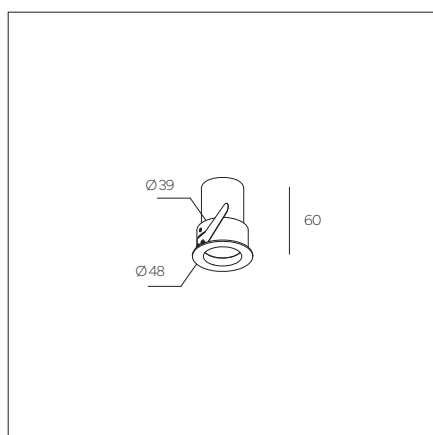

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
3013	Z 2700 7 3000 8 4000	B 4.5	E 20° P 45° O 20x60°	1 Bianco White 2 Nero Black	- No E On-Off D Push* L DALI* C Casambi*

* Dimensione driver
> Ø foro incasso
Driver dimensions
> Ø cutting hole

0,1 Kg

Ø42 mm

Bianco
White

Nero
Black

Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)

LED & CCTs custom (vedi pag. 9)
Disponibili / Available (see pag. 9)

Mini R 60 UGR<19

IP40




RG1


UGR
<19

CE

Ta
35°

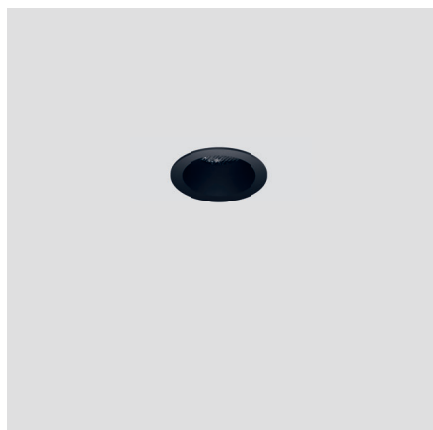

Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
10.5	9.5	250	>90	2700K 3000K 4000K	881 920 984	819 856 915

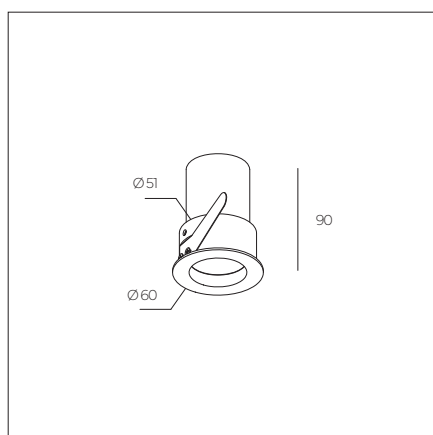

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
3014	Z 2700 7 3000 8 4000	A 10.5	C 14° 3 22° L 36° O 60x15° Y Wall W.	1 Bianco White 2 Nero Black	- No E On-Off D Push L DALI C Casambi



0,2 Kg



Ø54mm



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom (vedi pag. 9)
Disponibili / Available (see pag. 9)

Mini R 75 UGR<19

IP40



RG1


UGR
<19

CE

Ta
35°



Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
16.5	15	400	>90	2700K	1462	1316
				3000K	1544	1390
				4000K	1649	1484

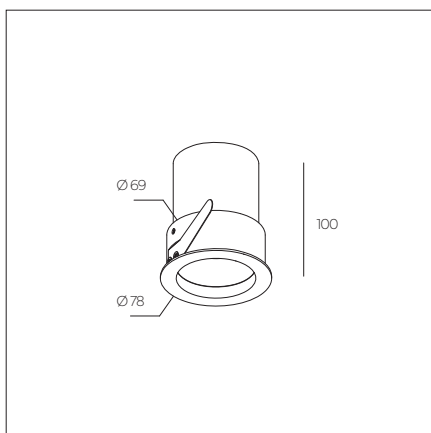

Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
3015	Z 2700 7 3000 8 4000	4 16.5	B 10° F 24° L 36° T 60° 7 70° O 60x15° Y Wall W.	1 Bianco White 2 Nero Black	- No E On-Off D Push L DALI C Casambi



0,3 Kg



Ø72mm



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom (vedi pag. 9)
Disponibili / Available (see pag. 9)

Mini R 100 UGR<19

IP40



RG1


UGR
<19



Ta
35°



Version	Watt	W LED	mA	IRC/CRI	CCTs	Nom lm	Del lm
COB	23	21.5	600	>90	2700K	2436	2192
					3000K	2595	2336
					4000K	2806	2525
Precision	16.5	15	400	>90	2700K	1462	1287
					3000K	1544	1359
					4000K	1649	1451

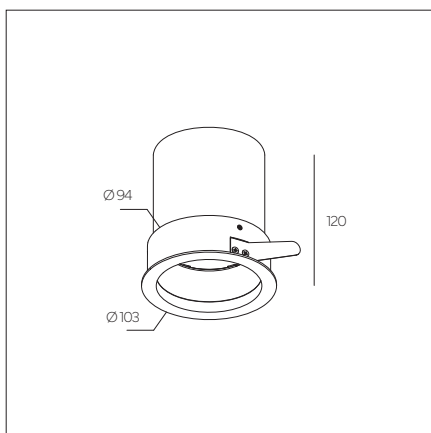

Versione Version	Codice Code	CCTs* CCTs*	Watt Watt	Fascio Beam	Colore Colour	Driver Driver
COB	3016	Z 2700	Q 23	F 24°	1 Bianco White	- No
		7 3000		L 36°	2 Nero Black	E On-Off
		8 4000		S 55°		D Push
				7 70°		L DALI
				O 60x15°		C Casambi
				Y Wall W.		
Precision			4 16.5	A 8°		



0,5 Kg



Ø 96mm



Bianco
White



Nero
Black



Finiture custom (vedi pag. 18)
Custom finishes (see pag. 18)



LED & CCTs custom (vedi pag. 9)
Disponibili / Available (see pag. 9)